



EURO 4310

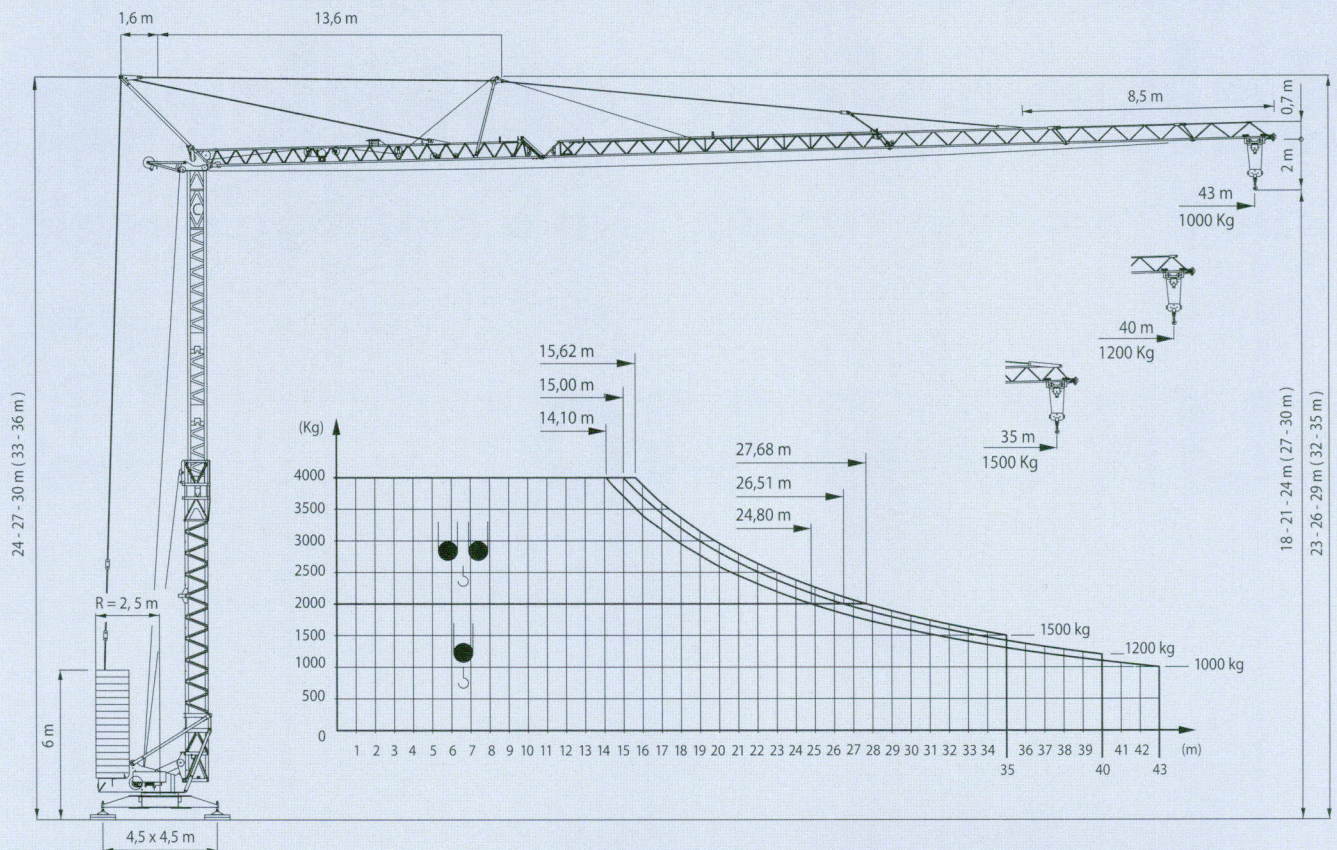

Ausleger in Horizontalstellung Flèche horizontal / Braccio orizzontale

Tragkraft/Charge/Pesi Ausladung/Portée/Sbraccio	kg	4000	2000	1500	1200	1000
 35,0 m	m	15,62	27,68	35,0		
 40,0 m	m	15,00	26,51	40,0		
 43,0 m	m	14,10	24,80			43,0

Daten mit FU-Steuerung / Dates avec Inverter / Dati con Inverter

		50 m/min	1500 kg
		25 m/min	2000 kg
		6,2 m/min	2000 kg
		25 m/min	3000 kg
		12,5 m/min	4000 kg
		3,1 m/min	4000 kg
		11-21-42 m/min	
		0,2-0,6-0,9 1/min	

Hakenhöhe
hauteur s/crochet
altezza al gancio

18/21/24 m
27/30 m

Abstützung
ecartement de voie
scartamento

4,5 x 4,5 m

Drehradius
rayon de giration arrière
raggio di rotazione

2,5 m

Konstruktionsgewicht
poids de la grue
peso della gru

17,8 t

Gegenballast
contre poids
zavorra contrappeso

30,21 t

Eckdruck
pression d'angle
pressione su uno stabilizzatore

31 t

Gesamt-Motorenleistung
puissance totale des moteurs
forza motrice totale

23 kW

Kabelquerschnitt
section du cable
sezione del cavo sottogomma

4 x 16 mm²

Conducta

BAUMASCHINEN ■ RAUMSYSTEME ■ UMWELTECHNIK